

The photos are of Armorbelt installations to illustrate its capabilities and broad application. Some include special features. All are available in Armorbelt II on request



Armorbelt's smooth clean hard flat 8 ft. wide surface has produced most of the urethane foam in the U.S.



Smooth, stable surface is ideal for assembly.



55 gallon drum handling calls for durability.




Smooth in-line accumulation gives canned shortening a 12 minute unagitated hardening period.



A four Armorbelt "moving pressure tunnel" produces a continuous block of rigid foam.




Heavy bags slide on and off easily. Belt stays in track.

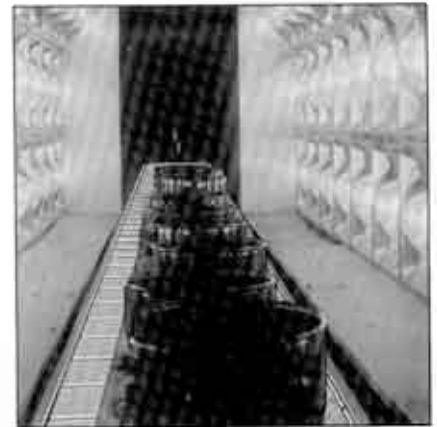

High load capacity and heat resistance facilitates continuous production line curing of power transformers.



Wide Armorbelt accepts mattresses and cushions from four production lines.

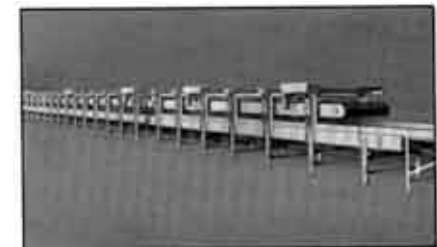

High pressure capability and synchronized positive drive requirements of double belt laminating lines are served by Armorbelts around the world.



Reflective heat resistant Armorbelt on this automotive topper line is easy to clean of spilled latex cement.