
high-lift KARRY-ALL DIMENSIONS

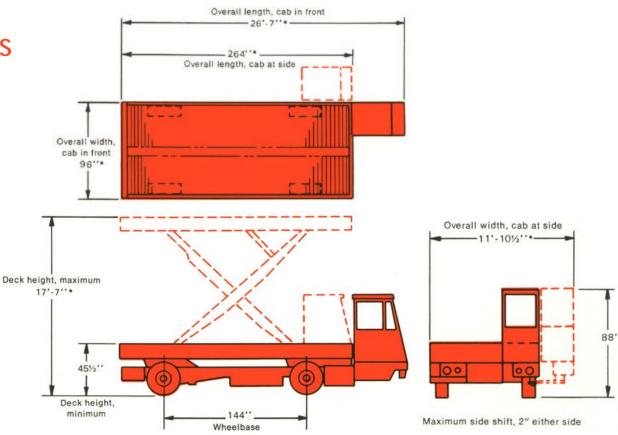

MODEL KH-14

SPECIFICATIONS

Payload, maximum	14,000 pounds*
Gross vehicle weight, maximum	30,000 pounds
Lifting mechanism	hydraulic cylinders
Lifting/lowering speed	45 seconds full travel
Cargo deck	2 rows of 42" powered rollers
Gasoline engine	industrial 361 cu. In. Chrysler V-8*
Transmission	Allison AT540 4-speed automatic*
Maximum highway speed	50 MPH*
Turning radius to outside of tire track	25 ft. 3 in.
Tires	14 x 171/2 super single duplex*
Steering	
Brakes	Air over hydraulic

^{*} Depending upon design requirements.

OPTIONS

A **Van Body** is also optionally available, as is a "Pup Trailer" with a 96" x 260" powered roller deck.

The HIGH-LIFT KARRY-ALL is one component of the total Kornylak cargo handling system. The total system includes powered and non-powered conveyor track sections, belt loaders, cargo lift, and other components to provide a fully-automated cargo handling facility which can be tailored to specific site requirements.

In accordance with our established policy of constant improvement, we reserve the right to amend these specification at any time without notice.

The only warranty applicable is our standard written warranty. We make no other warranty, expressed or implied, and particularly make no warranty of suitability for any particular purpose.

