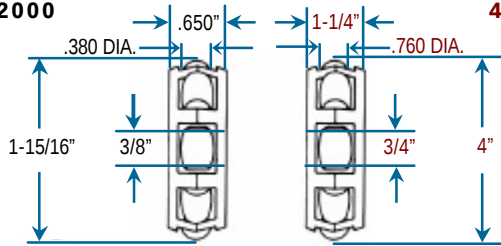

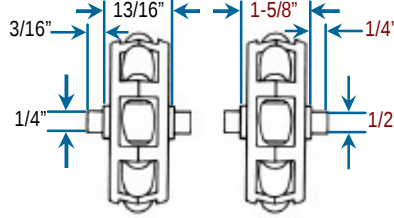
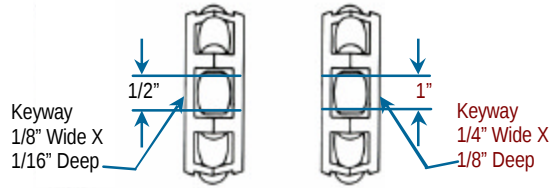
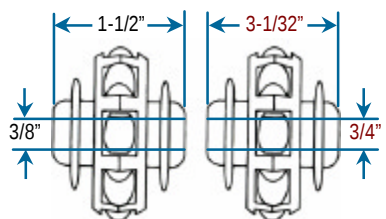
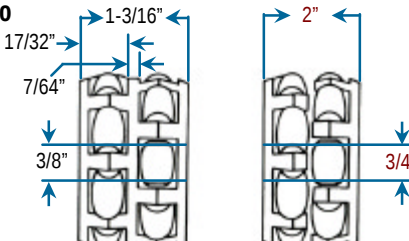



Standard Transwheel Models

Plain Bore 	20004000 	PLAIN BORE: Models 2051, 4201 For applications where side clearance is assured to allow the wheel to rotate freely without a bushing Also Available In: 2": 1/4" ID, 1/2" ID, 10mm, HI, X 4": 3/4" ID, HI, X, XU
Bushed 	20004000 	BUSHED: Models 2051B, 4201B - Guarantees wheel side clearance in applications where wheel is clamped between rails or spacers - Has exact diameter, width, and bore as skatewheels - Converts any portion of existing skatewheel conveyor into ball table equivalent Also Available In: 2": HI, X 4": HI, X, XU
Axled 	20004000 	AXLED: Models 2051A, 4201A - Can conveniently be dropped into a slotted channel without the need for an axle - Shoulders on the built-in axle maintain wheel side clearance Also Available In: 2": HI, X 4": HI, X, XU
Keyway 	20004000 	KEYWAY: Models 2051K, 4201K Mounts on a keyed shaft to provide powered movement of load in wheel direction Also Available In: 2": HI, X 4": HI, X, XU
Sprocketed 	20004000 	SPROCKETED: Models 2051S, 4201S - Turns on plain shaft when chain driven to provide powered movement in wheel direction - Sprocket on each side permits chain engagement on either or both sides - Sprockets are welded or available separately Also Available In: 2": HI, X 4": HI, X, XU
Multiple Row 	20004000 	MULTIPLE ROW: Models 2052, 4202 - Provides smoother rolling in single wheel applications - Available in three styles: plain bore, bushing, axle Also Available In: 2": 1/4" ID & Bushing, 1/2" ID & Keyway, HI, X 4": 1/2" ID & Bushing, 1" ID & Keyway, HI, X, XU
Hex Bore 	4000 	HEX BORE: Model 4201HB Mounts on hex shaft to provide powered movement of load in wheel direction Also Available In: 2": Available Upon Request 4": HI, X, XU

Maximum Load Capacity for Each Model Based on Bottom Surface Indentation Per Wheel				
	Model 2051	Model 2052	Model 4201	Model 4202
Steel	25 lbs.	25 lbs.	100 lbs.	100 lbs.
Plywood	7.5 lbs.	15 lbs.	40 lbs.	80 lbs.
200 lbs. Test Corrugated	5 lbs.	10 lbs.	20 lbs.	40 lbs.

NOTE: HI: High-Impact Plastic, X: Synthetic Rubber Coated Polypropylene Rollers, XU: Polyurethane Rollers

NOTE: **HI:** High-Impact Plastic, **X:** Synthetic Rubber Coated Polypropylene Rollers, **XU:** Polyurethane Rollers



Kornylak Corporation
 400 Heaton Street
 Hamilton, Ohio 45011

Phone: 513-863-1277
Toll Free: 800-837-5676
Fax: 513-863-7644

www.kornylak.com
www.omniwheel.com